




The SharpEye Model 20/20SI is a new version of the Triple IR Spectrum Flame Detector designed to provide maximum fire protection. The optical sensors and filters have been carefully selected to ensure the greatest degree of spectral matching to the radiant energy emissions of fire, and the lowest degree of matching to non-fire stimuli.

The patented Triple IR (IR3) circuit design scans for oscillating IR radiation (1 to 10 Hz) in the spectral bands ranging from 4.0 to 5.0 microns. This highly advanced detector uses programmable algorithms which check the ratio and correlation of data received by the three sensors.

This version of the IR3 has a sealed electronics & sensor section to ensure protection from the environment during installation.

The microprocessor design allows for unique field programmability not found in similar detectors, making the 20/20SI highly immune to false alarms.

The detector has applications in a wide range of industrial and commercial facilities, where the threat

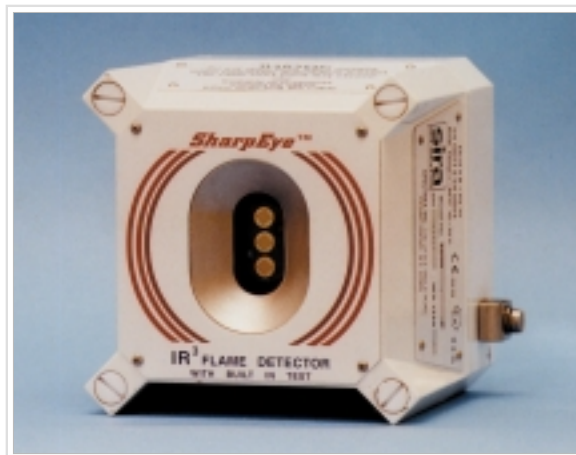

of accidental fire involves hydrocarbon fuels, such as gasoline, kerosene, diesel fuel, aviation jet fuels like JP-4, JP-5, JP-8, hydraulic fluids, paints and solvents, hydrocarbon gases like ethylene and polyethylene, natural gas (LNG), town gas, liquefied petroleum gas (LPG), methane, ethane, propane, etc.

The patented Triple IR design offers two to three times the detection distance of any conventional IR or UV/IR detector.

MAIN FEATURES

- Triple Spectrum Design
- Sensitivity Selection
- User Programmable Configuration
- Highly Immune to False Alarms
- Automatic and Manual Built-In Test (BIT)
- Standard 4-wire Connection
- 4-20mA sink or source (3-4 wires) configuration
- RS-485 Modbus Compatible
- MTBF Minimum 100,000 Hours
- 3-Year Warranty
- FM, ATEX and Gost K Approved

APPLICATIONS

- **Aircraft Hangars** - landing gear pits, under-wing and over-wing protection
- **Automotive** - manufacturing, paint spray booths
- **Chemical Industry** - production, storage, transportation
- **Explosives & Munitions** - handling and storage
- **Oil & Gas** - exploration, production, storage and offloading
- **Offshore Platforms** - fixed rigs and floating vessels FPSO
- **Onshore** - refineries, loading terminals, pipelines
- **Paint** - manufacturing facilities
- **Petrochemicals** - production, storage, shipping facilities
- **Pharmaceutical Industry**
- **Power Generation Facilities** - pump areas, generator rooms, unmanned stations, gas-fired and coal-fired reactors
- **Printing Industry** - solvent handling, presses, drying processes
- **Tank Farms** - floating-roof and fixed-roof tank areas
- **Warehouses** - storage facilities for flammable materials
- **Waste Disposal Facilities** - incineration, processing and storage of flammable waste materials (solids, liquids, gases)

GENERAL SPECIFICATIONS

Spectral Response	Three IR Bands																								
Detection Range (Highest Sensitivity Setting for 1 ft ² (0.1m ²) pan fire)	<table border="0"> <tr> <td>Gasoline</td> <td>200 ft (60m)</td> <td>IPA (Isopropyl Alcohol)</td> <td>90 ft (27m)</td> </tr> <tr> <td>n-Heptane</td> <td>200 ft (60m)</td> <td>Methanol</td> <td>76 ft (23m)</td> </tr> <tr> <td>Diesel Fuel</td> <td>140 ft (42m)</td> <td>Methane*</td> <td>50 ft (15m)</td> </tr> <tr> <td>JP5</td> <td>150 ft (45m)</td> <td>LPG (Propane)*</td> <td>60 ft (20m)</td> </tr> <tr> <td>Kerosene</td> <td>150 ft (45m)</td> <td>Polypropylene Pellets</td> <td>16 ft (5m)</td> </tr> <tr> <td>Alcohol (Ethanol)</td> <td>90 ft (27m)</td> <td>Office Paper</td> <td>60 ft (20m)</td> </tr> </table> <p><i>*20" (0.5m) long 8" (0.2m) width plume fire</i></p>	Gasoline	200 ft (60m)	IPA (Isopropyl Alcohol)	90 ft (27m)	n-Heptane	200 ft (60m)	Methanol	76 ft (23m)	Diesel Fuel	140 ft (42m)	Methane*	50 ft (15m)	JP5	150 ft (45m)	LPG (Propane)*	60 ft (20m)	Kerosene	150 ft (45m)	Polypropylene Pellets	16 ft (5m)	Alcohol (Ethanol)	90 ft (27m)	Office Paper	60 ft (20m)
Gasoline	200 ft (60m)	IPA (Isopropyl Alcohol)	90 ft (27m)																						
n-Heptane	200 ft (60m)	Methanol	76 ft (23m)																						
Diesel Fuel	140 ft (42m)	Methane*	50 ft (15m)																						
JP5	150 ft (45m)	LPG (Propane)*	60 ft (20m)																						
Kerosene	150 ft (45m)	Polypropylene Pellets	16 ft (5m)																						
Alcohol (Ethanol)	90 ft (27m)	Office Paper	60 ft (20m)																						
Response Time	Typical 5 sec.																								
Adjustable Time Delay	Up to 30 sec. (up to 20 sec. in compliance with FM requirements)																								
Sensitive Range	4 Sensitive Ranges for 1 ft ² (0.1m ²) gasoline pan fire: from 50 ft (15m) to 200 ft (60m)																								
Field of View	90° horizontal, 90° vertical																								
Built-in-Test	Manual and Automatic BIT																								
Temperature Range	<table border="0"> <tr> <td>Operating:</td> <td>-40°F (-40°C) to 160°F (70°C)</td> </tr> <tr> <td>Operating Option:</td> <td>-40°F (-40°C) to 185°F (85°C)</td> </tr> <tr> <td>Storage:</td> <td>-65°F (-55°C) to 185°F (85°C)</td> </tr> </table>	Operating:	-40°F (-40°C) to 160°F (70°C)	Operating Option:	-40°F (-40°C) to 185°F (85°C)	Storage:	-65°F (-55°C) to 185°F (85°C)																		
Operating:	-40°F (-40°C) to 160°F (70°C)																								
Operating Option:	-40°F (-40°C) to 185°F (85°C)																								
Storage:	-65°F (-55°C) to 185°F (85°C)																								
Humidity	Up to 95%																								

ELECTRICAL SPECIFICATIONS

Power Supply	Operating Voltage: 18-32 VDC		
Power consumption	<table border="0"> <tr> <td>Max. 70 mA in stand-by</td> </tr> <tr> <td>Max. 110 mA in alarm</td> </tr> </table>	Max. 70 mA in stand-by	Max. 110 mA in alarm
Max. 70 mA in stand-by			
Max. 110 mA in alarm			
Electrical Connection	2 x 3/4" - 14NPT conduits or 2 x M25 x 1.5 mm ISO		
Electrical Input Protection	According to MIL-STD-1275B		
Electromagnetic Compatibility	EMI/RFI protected CE Marked		

OUTPUTS

Relays	<table border="0"> <tr> <td>Alarm</td> <td>- 2A at 30 VDC, 0.5A at 250 VAC</td> </tr> <tr> <td>Fault and Accessory</td> <td>- 5A at 30 VDC and 250 VAC</td> </tr> <tr> <td colspan="2">Fault relay normally closed, others normally open</td> </tr> </table>	Alarm	- 2A at 30 VDC, 0.5A at 250 VAC	Fault and Accessory	- 5A at 30 VDC and 250 VAC	Fault relay normally closed, others normally open									
Alarm	- 2A at 30 VDC, 0.5A at 250 VAC														
Fault and Accessory	- 5A at 30 VDC and 250 VAC														
Fault relay normally closed, others normally open															
4-20mA	<table border="0"> <tr> <td colspan="2">Sink (source option) configuration</td> </tr> <tr> <td>Fault:</td> <td>0 ±0.5mA</td> </tr> <tr> <td>BIT Fault:</td> <td>2mA ±10%</td> </tr> <tr> <td>Normal:</td> <td>5mA ±10%</td> </tr> <tr> <td>Warning:</td> <td>10mA ±5%</td> </tr> <tr> <td>Alarm:</td> <td>15mA ±5%</td> </tr> <tr> <td>Resistance Loop:</td> <td>100-600 Ω</td> </tr> </table>	Sink (source option) configuration		Fault:	0 ±0.5mA	BIT Fault:	2mA ±10%	Normal:	5mA ±10%	Warning:	10mA ±5%	Alarm:	15mA ±5%	Resistance Loop:	100-600 Ω
Sink (source option) configuration															
Fault:	0 ±0.5mA														
BIT Fault:	2mA ±10%														
Normal:	5mA ±10%														
Warning:	10mA ±5%														
Alarm:	15mA ±5%														
Resistance Loop:	100-600 Ω														
RS-485	The detector is equipped with an RS-485 communication link that can be used in installation with computerized controllers. The RS-485 is Modbus compatible														

MECHANICAL SPECIFICATIONS

Dimensions	4.7" x 5.2" x 5.2" (100 x 132 x 132 mm)		
Weight	<table border="0"> <tr> <td>Aluminum: 8.1Lb (3.7 Kg)</td> </tr> <tr> <td>St.St 316L: 14.3Lb (6.5 Kg)</td> </tr> </table>	Aluminum: 8.1Lb (3.7 Kg)	St.St 316L: 14.3Lb (6.5 Kg)
Aluminum: 8.1Lb (3.7 Kg)			
St.St 316L: 14.3Lb (6.5 Kg)			
Enclosure	Aluminum, heavy-duty copper free (less than 1%), white epoxy enamel finish. Optional - Stainless Steel 316L with electro polish finish.		
Environmental Standards	Meets MIL-STD-810C for Humidity, Salt & Fog, Vibration, Mechanical Shock, High Temp, Low Temp		
Water and Dust	IP66 and IP67 per En60529 NEMA 250 6P		

HAZARDOUS AREA APPROVALS

ATEX	EX II 2G, EExd IIB + H2 T5 (70°C), T4 (85°C) EX II 2G, EExde IIB + H2 T5 (70°C)
FM	Class I Div. 1, Groups B, C & D Class II Div. 1, Groups E, F & G

ACCESSORIES

Fire Simulator	20/20-310
Swivel Mount	20/20-003 (St. St. 316L)
PDA Kit	799820, 799810