

D-Guard™

Digital gas detector. With Sounder & Strobe



Zero stability logic

One man calibration

Non intrusive calibration

Graphical backlit display

No alarm calibration

Simple user options

One board does all

No tool calibration

Isolate feature

intrinsically safe

Fully programmable processor control

High impact non-static housing

Water resistant IP 66 design

Two year warranty

GasTech Australia has released a new series of gas detectors: The Digital Guard (D-Guard™). This new style of gas detector uses an advanced processor and program logic, making the choice of a reliable detector simple.

Our engineers have developed high end electronics and a program that monitors the sensor's outputs and is tailored to and pre-programmed to many different gas types. The program and electronics process the sensor's output trends and calculates accurate and stable readings which are displayed on the permanently backlit graphic display. This is transmitted back to the processor using the industry standard 4-20mA.

Mechanic design:

One card to suit all applications is the philosophy. Many of our customers are in remote locations around the world and holding stock for all the different kinds of detectors and ranges that they have on site is expensive and difficult to manage. In the D-Guard™ design this card had to be easily configured for the different gasses, ranges, sensors styles and must have enough program memory to hold the logic for each type of gas. Our engineers were able to achieve all this, with enough resources still available to implement many future features. Each card will be simple to upgrade as needs change.

Housing is a IP 66 316 stainless steel filled anti static Nylon, which is UV stable. The design of the housing was designed to meet the most challenging condition encountered in off shore oil rigs.

End user features:


No tool calibration or set up. No screwdrivers, No meters, no special programming tools required to calibrate.

Backlit display. This feature is not available on most loop-powered devices due to high power consumption but it is one of the most requested features, due to operations at night or in dark areas. Our engineers used the latest low power components leaving sufficient resources to implement a back light.

No alarms during calibration. This is probably one of the most useful features of this system. Once you open the calibration door the D-Guard™ locks the output signal at zero gas reading until the calibration process is finished. Our engineers have implemented a fail-safe logic to maintain constant monitoring. There is also an Isolate switch, which will permanently isolate all signals and alarms until the operator reactivates the unit.

D-Guard™


Sensor & 4-20mA Transmitter Specifications

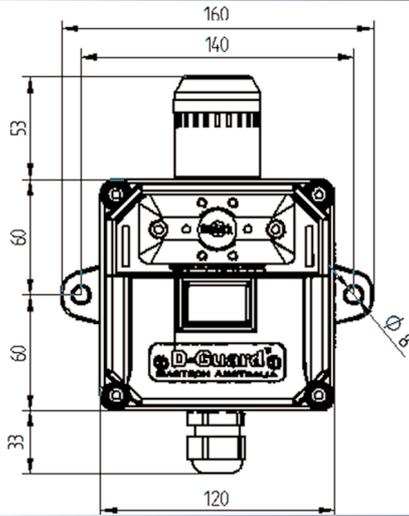

Typical range of Gases Detected

Ammonia (NH ₃) 0 to 100 ppm	in 1 ppm increments
Carbon Monoxide (CO) 0 to 100 ppm	in 1 ppm increments
Chlorine (CL ₂) 0 to 10 ppm	in 0.1 ppm increments
Hydrogen (H ₂) 0 to 100 ppm	in 0.5 ppm increments
Hydrogen Cyanide (HCN) 0 to 50 ppm	in 1 ppm increments
Hydrogen Sulfide (H ₂ S) 0 to 200 ppm	in 1 ppm increments
Hydrogen Chloride (HCL) 0 to 200 ppm	in 1 ppm increments
Nitric Oxide (NO) 0 to 100 ppm	in 1 ppm increments
Nitrogen Dioxide (NO ₂) 0 to 10 ppm	in 0.1 ppm increments
Phosphine (PH ₃) 0 to 1 ppm	in 0.01 ppm increments
Sulfur Dioxide (SO ₂) 0 to 10 ppm	in 0.1 ppm increments
Ethylene Oxide (ETO) 0 to 20 ppm	in 0.1 ppm increments
Ozone (O ₃) 0 to 2 ppm	in 0.01 ppm increments
Oxygen (O ₂) 0 to 25%	in 0.1 %Vol increments

analogue Output	Two wire 4-20mA
Indication	Graphical Back Light LCD display
Relay Outputs	3 user adjustable SPDT
Sounder	98db
Strobe	Red, Amber Clear, Blue, Green, Yellow
Input Power	20-30VDC
Response Time	90% full scale response in less than 40 seconds sensor dependent
Operating Temperature	-20°C to +50°C
Humidity Range	0-95% non condensing
Accuracy	±5% of reading
Repeatability	±1% of reading
Sensor style	Standard 7 series or 4 series plug in sensors
Calibration	Non intrusive push buttons, no screwdrivers or meters needed
Drift	Less than 5% signal loss per year
Weight	500g
Dimensions	160mm x 94mm x 120mm (206 mm with cable gland)
Enclosure	IP66 anti static RFI/EMI UV stable Chemical resistant Nylon
IP rating	IP65 sounder
Warranty	2 Years on sensor and electronics for O ₂ , CO & H ₂ S 1 year on all other sensors
Part Number	65-1012-xxx (xxx is gas type, eg. CO or H ₂ S)

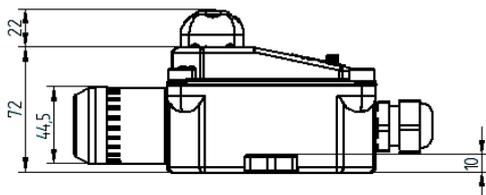

Distributed By

GasTech Australia Pty Ltd
24 Baretta Rd
Wangara Western Australia 6065
Tel 1800 999 902
Fax 1800 999 903
<http://www.gastech.com.au>

GASTECH
AUSTRALIA