

VDP 2™

Vibrating Diaphragm Gas Pump



Gastech Australia has designed the VDP2 Sample Pump primarily for use where a remote sample draw option is required.

Utilizing "vibrating diaphragm" principle provides a sample pump which can provide continuous reliable service.

A standard flow rate of 0 to 3 LPM is available. A integrated flow meter is provided to show pump operation.

The Gastech VDP2 Sample Pump is constructed from the same durable, weather & chemical proof anti-static nylon material as Gastech DGuard transmitters.

The Gastech VDP2 Sample Pump is compatible for use with all associated Gastech gas sensor types.

Key Features:




Designed for remote sample draw

Vibrating Diaphragm Technology

Reliable for continuous operations

Durable, Weather & Chemical Proof

Compatible for all associated Gastech gas sensor types

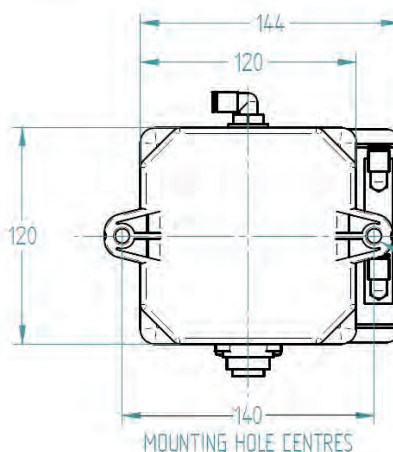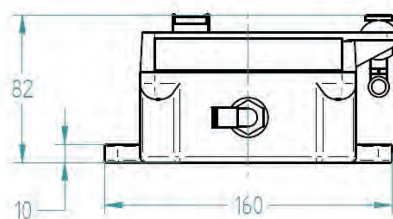

VDP 2™

Vibrating Diaphragm Gas Pump

Pump Type	Vibrating Diaphragm
Flow Rate	0 to 3 LPM
Operating Voltage	24VDC (nominal)
Power Consumption	150mA (peak)
Net weight	400 grams
Dimensions	140W x 120H x 82D mm
Mounting	(x2) 8mm integral mounting lugs
Ordering Information	Part No 30-1010



Distributed By

Telephone +61 8 6108 0000
Facsimile +61 6 9408 1868
Free call 1800 999 902
Email info@gastech.com.au
24 Baretta Road
Wangara Western Australia 6065

GASTECH
AUSTRALIA

Specifications subject to change without notice (Nov 2013)