

B-GUARD MILLENIUM CO²

Infrared Carbon Dioxide Gas Detector

GTA Millenium infrared carbon dioxide detector is a single source dual wavelength instrument. The sensing and reference elements are selfcompensating for optical integrity and other signal inhibitors. The industry standard 4-20 mA analog output provides complete remote alarm, fault and calibration signals.

APPLICATIONS

The GTA Millenium CO² detectors are designed to be used where rugged, explosion proof, ultra reliable device is required.

- Gas Storage
- Water Industry
- Injection Oil Recovery
- Environmental Chambers
- Industrial Process Control
- Laboratories
- Food Processing/Packaging
- Breweries/Wineries
- Greenhouses
- HVAC (DCV, Energy Management)
- Bottling Plants
- Engine Test Cells


KEY FEATURES

- Infrared sensing technology
- Virtually maintenance free
- Low cost of ownership, over five years operating life
- Immune to poisoning and etching
- Designed for harsh environments
- Explosion proof
- Compact & lightweight
- Fast response time
- Smart calibration
- Self-compensating optical bench
- No moving parts
- Heated optical chamber
- Low power consumption
- Operates in constant hydrocarbon background
- Operates in anaerobic atmospheres
- Fault indications for all failure states
- Routine calibrations are not required
- 4 to 20 mA output
- Many ranges available
- Can be coupled with a transmitter for network applications
- RS-485 communication link available
- Digital display option available

B-GUARD MILLENIUM CO²

SPECIFICATIONS Specifications subject to change without notice

Detectable Gases	Carbon Dioxide
Operating Voltage	18-36 VDC
Power Consumption	4 Watts at 24 VDC
Analog Output	4 - 20 mA (sourced)
Range	0 - 5% Volume Standard Range Alternate ranges are available
Enclosure Construction	Copper Free non-corrosive aluminum, nickel-plated, Stainless Steel
Mounting	3/4" NPT
Ingress Protection	IP66
Accuracy	+/- 3% 0 to 50% full scale +/- 5% 51 to 100% full scale
Response Time	(with standard weather protection) T50 < 3sec. T90 < 5 sec.
Temperature Rating	-40o to +70oC
Humidity	0 - 99% (non-condensing)
Classification	Class 1, Div. 1 Groups B, C & D
EMI Protection	Operates correctly with 5 Watt walkie talkie keyed at 3 feet
Weight	Approx. 2 lbs. (.9 Kg)

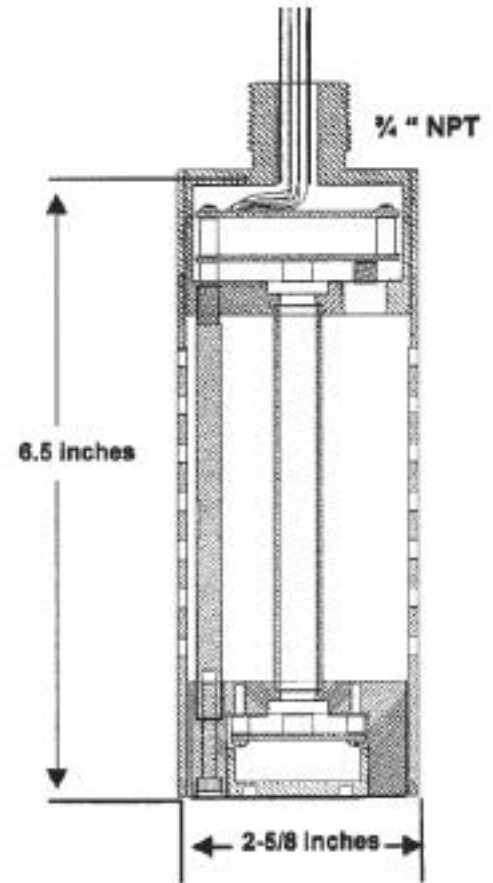

t +61 8 6108 0000

e info@gastech.com

w gastech.com

HEAD OFFICE
 24 Baretta Road
 Wangara WA 6065
 Phone: +61 8 6108 0000

SYDNEY OFFICE
 21/25 Narabang Way
 Belrose NSW 2085
 Phone: +61 2 9451 0054

BRISBANE OFFICE
 PO Box 349
 Cannon Hill Qld 4170
 Phone: +61 7 3160 0901

DISTRIBUTED BY